



Neosys™ Air to Water Liquid Chiller and Heat Pump

Energy efficiency acoustic performance



LIQUID CHILLER 200kW 1000kW
HEAT PUMP 200kW 500kW

Neosys™ Air to Water Liquid Chiller and Heat Pump Product Overview



The Neosys™ delivers energy efficiency at full and partial load by the use of R410A multi scroll compressors and specific algorithms designed to reduce energy costs.

R410A, unequalled performance with reduced emissions

The Neosys™ is equipped with high performance cooling systems that reduce energy consumption by the use of R410A multi scroll* compressors and an optimised heat exchange area.

- Reduced power input for improved COP
- Increased isentropic efficiency of the compressors
- Greater power efficiency than other HFC fluids
- Zero potential for destruction of the Ozone layer
- Very low refrigerant charge to limit environmental impact



Multi scroll high performance compressors for optimum, long lasting efficiency

- Multi-stage power regulation giving high performance at partial load
- Solid reliability owing to disengagement of the spiral in the event of ingesting liquid or foreign particles (Compliant™ patented system)
- Safe operation. The machine retains at least 50% of its power through having twin cooling circuits



* Multi scroll from 47 kW to 200 kW.
Single scroll 25 to 43 kW.

Intelligent control that continuously optimises power consumption

With the 7 day time programming periods, Climatic™ control manages power consumption according to the use of the premises: automatic switching to occupation mode, unoccupied or frost-free. Regulation permits automatic winter/summer offsetting of water set point according to the outside air temperature.

Climatic™ regulation reduces the heat pump consumption by restricting the number of defrost cycles owing to the patented Dynamic™ Defrost. Depending on the size of the installation, Climatic™ regulation can control from one to eight units in master/slave or cascade operation and provides communication with the building management system (BMS) or Lennox Adalink™ monitoring.

- ModBUS®
- LonWorks®
- BacNET®
- Adalink™



“Designed to encourage eco-efficiency”



Neosys™ Air to Water Liquid Chiller and Heat Pump Product Overview



One of the main features of the Neosys™ unit is an adjustable sound level for night and day to comply with the surrounding acoustic requirements.

Intelligent adaptation of the sound level

The Neosys™ is fitted with the patented Active Acoustic Attenuation System™ which enables the customer to program/set noise level by time slot and then choose the performance or required noise level mode. The Active Acoustic Attenuation System™ takes care of everything.



It automatically adjusts the airflow from the Owlet™ variable speed fans according to the building load while complying with the permitted sound level. It also enables floating condensing pressure management.

- Elimination of start/stop noises
- Adjustable sound level
- Floating condensing pressure

OWLET™ fans and acoustic attenuation of compressor noise

The Neosys™ is designed to achieve one of the lowest noise levels on the market. The principal technological innovations are the new fan blades and scroll compressor operation. Usage of Owlet™ fans, together with acoustic insulation of the compressor housings, Neosys™ has achieved acoustic performance that ensures compliance in noise sensitive locations.



“Owlet fan with profiled blades”

Neosys™ Air to Water Liquid Chiller and Heat Pump Product Overview



The cost of pumping power represents more than 20% of the total energy cost

In a water system, the pump is one of the main energy consumption items. The energy cost of pumping can represent more than 20% of the total energy cost of a chiller. eDrive™ variable speed pump technology is part of the responses made by Lennox to save energy while exploring the possibilities of reducing installation costs.

The power consumption of the pump varies with the cube of the pump speed.

20% flow reduction = Power consumption reduced by 50%

40% flow reduction = Power consumption reduced by 80%

A 10 kW fixed speed pump operating 24h/24 consumes about 87,600 kWh a year or a power bill of \$13,140 (1 kWh = \$0.15 AUD). Choosing eDrive™ technology will save almost \$9,200 a year.


eDrive™ automatically controls energy costs

- At full load owing to electronic adjustment of the pump curve. Elimination of power losses caused by the manual water flow control valve
- At partial load by automatically reducing the pump speed when operating at reduced chiller load
- During shutdown periods of the cooler owing to operation of the pump at minimum speed
- On starting owing to the speed controller which reduces the starting current pump

The Neosys™ was designed in the spirit of Eco-design aiming to:

- **Limit toxic substances, use recyclable materials and reduce components:**
The Neosys™ uses HFC R410A cooling fluid which is an azeotropic mixture that does not damage the ozone layer. Its very low toxicity and non-flammability classify it in the “danger free” group according to ASHRAE standard. The micro channel and plate heat exchangers reduce the refrigerant charge by 40% thereby limiting the direct impact due to accidental loss of refrigerant (irregular loss associated with mechanical breakage or end of life cycle). Made entirely from aluminium, micro channel heat exchangers can be easily recycled and lead to a reduction in material in the order of 30% compared with traditional heat exchangers.

Pump energy consumption

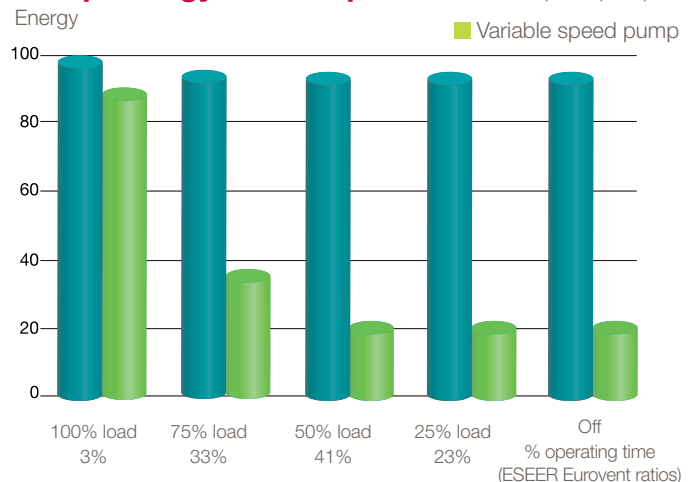

• Reduce energy consumption:

The impact of our machines on global warming is mainly due to the primary energy used for their operation. The Neosys™ is designed to achieve optimised energy performance throughout the year and limits the indirect release of CO₂ associated with the consumption of electricity. The use of variable speed fans, the eDrive™ variable speed pump, the high performance of our air/water heat pump have earned Certificates of Energy Reduction (BAT-TH-12, BAT-TH-14 – France only). By reducing energy consumption, the Neosys™ also reduces the energy bill and limits emissions of CO₂. Refer to TEWI to measure the global warming impact (Total Equivalent Warming Impact = direct loss of refrigerant and indirect effect of CO₂ emissions from power consumption).

• Extension of the life cycle, facilitate repair and end of life recycling:

The Neosys™ is fitted with multiple scroll of very high reliability, “zero maintenance” compressors. In the event of a failure or the end of the life cycle of a compressor, partial replacement of one of the scroll compressors limits the impact of waste material. The micro- channel heat exchangers with very high corrosion resistance and fan motors fitted with ceramic bearings triple the life cycle of these components versus traditional components.



Neosys™ Air to Water Liquid Chiller and Heat Pump Product Overview




The design of the Neosys™ focused on performance and long life

- Extended qualification tests (vibration, functional, acoustic and field tests) to ensure superior reliability
- Aluminium micro channel heat exchanger (cooling only) providing 3 times the resistance to corrosion and a mechanical design that protects the fins and reduces clogging. These units are produced by automated production process to guarantee better reliability versus traditional units
- Compressors and hydraulic equipment installed in a special compartment, V-mounting of the heat exchangers protecting the components from external climatic conditions (rain, hail) and allowing the use of high pressure cleaners
- Zero maintenance scroll compressors with axial and radial Compliance® which permits disengagement of the spiral in the event of abnormal ingestion of liquid or foreign particles. This technology results in improved reliability and extended life
- Fans fitted with hybrid ceramic bearings which double the life cycle of the motors and reduce the noise level. This type of hybrid sealed ceramic bearing requires limited, or even zero maintenance



Aluminium micro channel heat exchanger

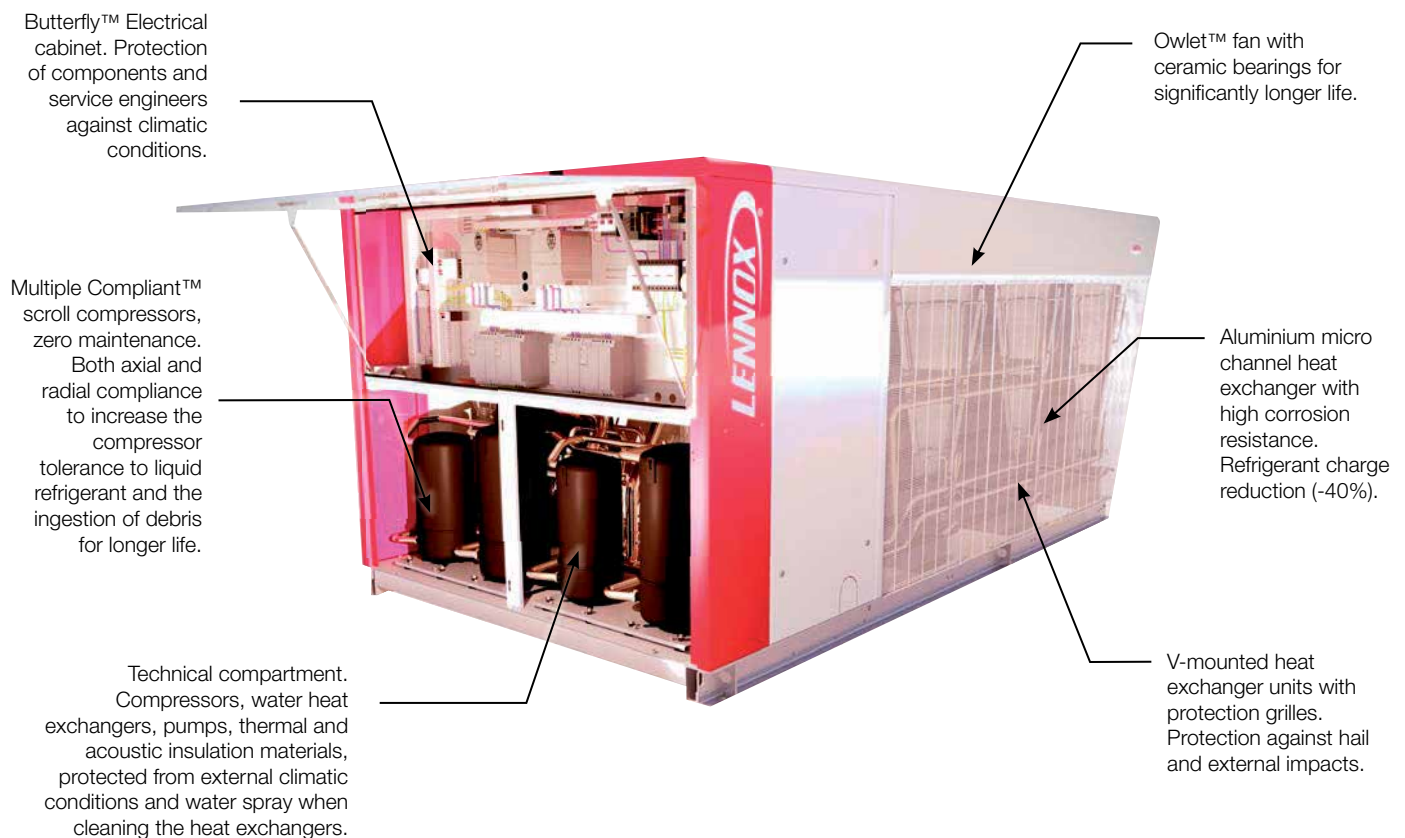

Neosys™

Air to Water Liquid Chiller and Heat Pump

Product Overview



Lennox designed the Neosys™ with a compact hydraulic module. The machine includes all the necessary hydraulic components: single or double pump, expansion vessel, air bleed, filter, electronic flow switch, manual or electronic water flow control valve, etc.

Neosys™ with low or high pressure pump

Depending on the nature of your hydraulic installation, Neosys™ can be fitted with the choice of a pump providing 150 or 250 kPa of pressure. To facilitate start-up, you can choose a classical hydraulic module with manual water flow control valve or, as an option, an electronic control, that will adjust the water flow to the actual requirements of the installation (optional eDrive™).


The eDrive™ variable water flow reduces installation costs

Up to now, two types of hydraulic systems were possible for liquid chillers: a “direct” constant flow circuit or a “decoupled” primary-secondary circuit with constant primary flow. The Neosys™ fitted with optional eDrive™ now offers a 3rd choice: variable primary flow. This is particularly beneficial in comparison with a “decoupled” circuit since only one pump is necessary.

Compared with a constant flow “direct” circuit, variable primary flow circuit may use 2-way valves on the terminal units instead of 3-way valves and thus contributes to reducing the installation cost.

In addition, the flow control valve is eliminated since the pump is electronically adjusted to the actual requirements of the plant.

These factors can considerably reduce the initial cost of the installation.

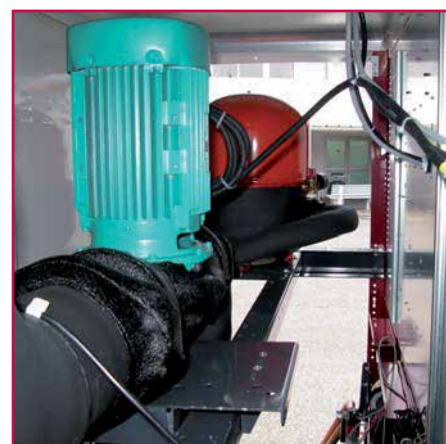

“Hydraulic module with low or high pressure pumps”

“Lennox eDrive™ variable primary water flow”



Lennox variable speed pump



Lennox speed controller



Lennox control Algorithms
Constant delta P mode: terminal units with 2-way valves.



Optional eDrive™
Variable Primary Water Flow by Lennox.

Neosys™

Air to Water Liquid Chiller and Heat Pump

Technical Information



Neosys™	NAC	200	230	270	300	340	420	480	600	640	680	840	960
		NAH	200	230	270	300	340	420	480	-	-	-	-
Cooling capacity ⁽¹⁾	kW	208	236	273	308	351	430	490	605	627	702	860	980
EER		2.9	2.7	2.6	2.9	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
ESEER		4.2	4.0	4	4.0	4.2	4.2	4.0	4.2	4.2	4.2	4.2	4.0
Heating capacity ⁽²⁾	kW	219	252	313	346	370	459	509	-	-	-	-	-
COP		3.1	3.0	3.0	3.0	3.0	3.0	3.0	-	-	-	-	-
Length NAC	mm	3590			4620		5650		6680		9040	11100	
Length NAH	mm	3590			4620		5650				-		
Width / Height	mm	2280 / 1964											
Operating Weight	kg	1984	2011	2259	2648	2938	3512	3621	3992	4030	6720	8000	8160

Nominal conditions: (1) water 12/7°C, air 35°C
(2) water 40/45°C, air 7°C

Equipment	NAC (Cooling only)	*NAH (Heat pump)
Scroll compressors, brazed plate water heat exchanger, micro-channel air heat exchangers (cooling only) or copper/aluminium (heat pump), OWLET™ variable speed fans, R410A refrigerant, Butterfly™ electrical panel, main switch, CLIMATIC control™, Active Acoustic Attenuation System™, customer display, water filter and electronic flow switch, Victaulic™ connections, all protection grilles, 3 year guarantee on main parts. Full Hydraulics form part of standard delivery up to 640kW. Neosys also uses a true twin circuit brazed plate heat exchanger as the evaporator.	Standard	
Hydraulic module with single or twin low pressure pump	Option	Option
Hydraulic module with single or double low pressure pump	Option	Option
Hydraulic module, e-Drive™ single high pressure variable speed pump	Option	Option
Hydraulic module, double e-Drive™ high pressure variable speed pump	Option	Option
Anti-freeze heater	Option	Option
Winter operation down to -20°C ambient temperature (Including electronic expansion valve)	Option	-
Operation for low temperature glycol down to -10°C (Including electronic pressure reducing valve)	Option	-
Partial heat recovery	Option	Option
"Free cooling" module, 1x V or 2x V	Option	Option
Flange connection /Anti-vibration mounts	Options	Options
Thermoguard™/Blygold™ anti-corrosion condenser coil treatment	Option	Option
Energy meter/Electronic starter/Power factor correction	Options	Options
Remote display/Modbus/Bacnet/ Lonworks/Adalink™	Options	Options

* NAH series available only on specific request





Australia Head Office

Heatcraft Australia Pty Ltd
286 Horsley Road, Milperra NSW 2214
Locked Bag 6501, Regents Park NSW 2143
(+61) 2 9774 7155

New Zealand Head Office

Heatcraft New Zealand Pty Ltd
12 George Bourke Drive, Mt Wellington
PO Box 12371 Penrose, Auckland
(+64) 9 276 4888

Heatcraft Store Locations

Australia

NSW METROPOLITAN

Alexandria 02 9667 4711
Unit 106, 35 Doody Street, Alexandria NSW 2015
Artarmon 02 9906 7674
2/22 Waltham Street, Artarmon NSW 2064
Brookvale 02 9939 5153
8A/42-46 Wattle Road, Brookvale NSW 2100
Castle Hill 02 8850 3055
Unit 1/8 Gladstone Road, Castle Hill NSW 2154
Chippendale 02 9318 2266
77 Myrtle Street, Chippendale NSW 2008
Narellan 02 4648 1533
3/14-16 Exchange Parade, Narellan NSW 2567
Padstow 02 9709 4822
36 Gibson Avenue, Padstow NSW 2211
Penrith 02 4722 3366
Unit 1/18 Abel Street, South Penrith NSW 2750
Prospect 02 9896 2700
4/1 Stoddart Road, Prospect NSW 2148
Rockdale 02 9567 7011
440 West Botany Street, Rockdale NSW 2216
Silverwater 02 8737 7400
1/106 Beaconsfield Street, Silverwater NSW 2128

NSW REGIONAL

Albury 02 6040 0143
2/23A Catherine Crescent, Lavington NSW 2641
Canberra 02 6239 1570
6/19 Tennant Street, Fyshwick ACT 2609
Coffs Harbour 02 6651 3390
Unit 5, 84-90 Industrial Drive,
North Boambee, NSW 2450
Lismore 02 6622 2272
2/36 Wyrallah Road, Lismore NSW 2480
Newcastle 02 4956 2722
14 Kings Road, New Lambton NSW 2305
Orange 02 6362 8849
2-3/243 McLachlan Street, Orange NSW 2800
Port Macquarie 02 6581 4040
Unit 1/50 Jindalee Road,
Port Macquarie NSW 2444
Tamworth 02 6765 2566
1 Avro Street, Tamworth NSW 2340
Tuggerah 02 4353 3218
Unit 4/22 Reliance Drive, Tuggerah NSW 2259
Wagga Wagga 02 6921 1259
4b Norton Street, Wagga Wagga NSW 2650
Wollongong 02 4229 1313
4/103-107 Auburn Street, Wollongong NSW 2500

QLD METRO, GOLD COAST & SUNSHINE COAST

Albion 07 3256 2120
7 Hudson Road, Albion QLD 4010
Brendale 07 3881 0070
Unit 118/193 South Pine Road, Brendale QLD 4500
Burleigh Heads 07 5593 6027
1/22 Hutchinson Street, Burleigh Heads QLD 4220
Geebung 07 3865 1399
1/452 Bilsen Road, Geebung QLD 4034
Gold Coast 07 5591 8188
3/16 Pinter Drive, Southport Qld 4215
Maroochydore 07 5479 4599
10A Kelly Court, Maroochydore QLD 4558
Moorooka 07 3848 0641
Unit 11/115 Muriel Avenue, Moorooka QLD 4105
Morningside 07 3902 9400
373 Thynne Road, Morningside QLD 4170
Underwood 07 3808 0300
Unit 3/74 Perrin Drive, Underwood QLD 4119

QLD REGIONAL

Bundaberg (A) 07 4151 2044
73 Thabeban Street, Bundaberg QLD 4670
Cairns 07 4035 4300
88-90 Buchan Street, Cairns QLD 4870
Mackay 07 4957 7772
4/21 Victoria Street, Mackay QLD 4740
Rockhampton 07 4922 9066
147 Kent Street, Rockhampton QLD 4700
Toowoomba 07 4639 7900
Unit 3, 2 Prescott Street, Toowoomba QLD 4350
Townsville 07 4775 1800
25 Keane Street, Currajong QLD 4812

WA

Belmont 08 9478 5033
2/130 Francisco Street, Belmont WA 6104
O'Connor 08 9331 8055
Unit 2, 14A Hines Road, O'Connor WA 6163
Osborne Park 08 9244 5033
19 Howe Street, Osborne Park WA 6017

TAS

Hobart (JV) 03 6272 0055
2 Linear Court, Derwent Park TAS 7009
Launceston (JV) 03 6334 6969
2/225 Wellington Street, Launceston TAS 7250

VIC METROPOLITAN

Bayswater 03 9720 1906
Unit 21/49, Corporate Boulevard,
Bayswater VIC 3153
Burwood 03 9808 0244
Unit 12, 125 Highbury Road, Burwood VIC 3125
Dandenong 03 9799 5900
3/294 South Gippsland Highway,
Dandenong South VIC 3175
Moorabbin 03 9532 2284
24 Kilpa Road, Moorabbin VIC 3189
Preston 03 9480 0321
18 Ovando Street, Preston VIC 3072
Truganina 03 8353 2140
29-31 Jessica Way, Truganina, VIC 3029
Tullamarine 03 9330 4222
17 Barrie Road, Tullamarine VIC 3043
West Melbourne 03 9328 3044
60-80 Adderley Street,
West Melbourne VIC 3003

VIC REGIONAL

Geelong 03 5248 4533
7 Roxanne Place, Newcomb VIC 3219
Mildura (A) 03 5021 1855
337 Ettiwanda Avenue, Mildura VIC 3500
Shepparton (A) 03 5821 3669
15 Campbell Street, Shepparton VIC 3630
Traralgon 03 5174 6403
Unit 4, 13 Standing Drive, Traralgon VIC 3844

SA

Adelaide 08 8354 0100
19-21 James Congdon Drive, Mile End SA 5031
Lonsdale 08 8326 4726
Unit 2/41-47 O'Sullivan Beach Road,
Lonsdale SA 5160
Mt. Gambier (A) 08 8723 0922
5 Scott Court, Mt Gambier SA 5290
Port Lincoln (A) 08 8683 0707
1 Thomas Court, Port Lincoln SA 5606
Wingfield 08 8260 2255
Unit 1, 209 Cormack Road, Wingfield SA 5013

NT

Alice Springs (A) 08 8953 4277
1/8 Fogarty Street, Alice Springs NT 0870
Darwin 08 8984 3840
68 Raphael Road, Winnellie NT 0820

A = Agent JV = Joint Venture

New Zealand

NORTH ISLAND

Auckland (Penrose) 09 525 7859
487 Great South Road, Penrose 1061
Auckland (Ponsonby) 09 361 6070
24a Williamson Avenue, Ponsonby 1021
Hamilton 07 847 7142
12 Devon Road, Frankton 3204
Hastings 06 873 3398
508 Warren Street, Mayfair 4122

Lower Hutt 04 566 4760

Unit 3, 419 Hutt Road, Lower Hutt 5010
Palmerston North 06 355 5449
589G Tremaine Avenue,
Palmerston North 4410
Tauranga (A) 07 571 1442
177 Eleventh Ave, Tauranga 3110

SOUTH ISLAND

Christchurch 03 374 5888
116 Carlyle Street, Sydenham 8023
Dunedin 03 470 1074
8 Bombay Street, Dunedin 9016



Scan to download a digital
version of this brochure

australia
13 23 50
heatcraft.com.au

new zealand
0800 653 330
heatcraft.co.nz

© & ™ – Registered Trade Mark and
Trade Mark of Heatcraft Australia Pty Limited

© Copyright 2014 Heatcraft Australia Pty Limited

Heatcraft Australia continually strive to improve products and
processes. We reserve the right to modify product features
without notice. Information is correct at time of printing.

KIRBY NEOSYS_0414